

CT100 SERIES | Ticket printing Scale

SPECIFICATIONS

| Model | CT100 | | |
|-----------------------|----------------------------------------------------------------------------------------------------------------------|-------------------|---------------|
| Max.capacity (kg) | 6 | 15 | 30 |
| Readability (g) | 1/2 | 2/5 | 5/10 |
| Display | Alpha-numeric LCD + backlight - PLU windows: 12 digit (14 segment) - Tare/Weight/Unit/Price: 5/5/6/7 (7 segment) | | |
| Printer Speed | Max. 75 mm/sec | | |
| Printer Resolution | Thermal printer - 32 Characters per line Recommended size for thermal paper - 58mm (Width) / 60mm (Maximum Diameter) | | |
| Interface | Default: RS-232C 2EA, Cash drower, USB device, RS-485, LAN Option: USB Host, Zigbee, WLAN | | |
| Operating temperature | -10°C~+40°C | | |
| Power | AC 230V(50 ~ 60Hz), AC + DC(Option), Pb Battery 12V/7A | | |
| Battery life | Weighing Mode only: 240mA, 28 hrs | | |
| | With backlight: 260mA, 26 hrs | | |
| | With printer: 1800mA, 4 hrs | | |
| Dimension (mm) | B type: 342(W) x 455(D) x 152(H) | | |
| | P type: 342(W) x 455(D) x 415(H) | | |
| | R type: 342(W) x 455(D) x 490(H) | | |
| | Platter size: 320(W) x 240(D) | | |
| Product weight | Standard type: 6.8 | Kg Pole type: 8Kg | R type: 8.5kg |

FEATURES

- 30 Direct PLUs, 1000 Indirect PLUs with 30 Function Keys, 2 Special PLUs
- Max 8 different clerk sales support
- PC software management(CL-Works)
- Rechargeable battery
- Max 6 Floating vender function(with RS-485)

OPTIONS

- USB Host Function
- Zigbee, Wireless ethernet interface
- Platter PLU cover
- Platter back rail




CAS BLDG., # 440-1, SUNGNAE-DONG, GANGDONG-GU, SEOUL, KOREA TEL_ 82 2 2225 3500 FAX_ 82 2 475 4668

http://www.globalcas.com

Specifications are subject to change for improvement without prior notice.

DIMENSIONS

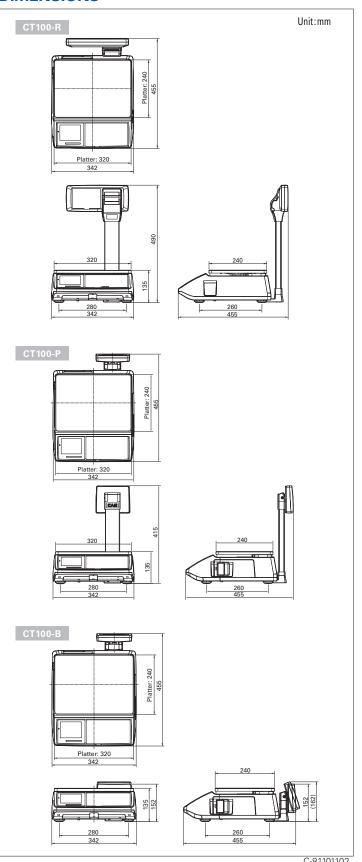







LED Backlight

CT100 SERIES

Ticket printing Scale Various interface Easy & PLU transmisson Max 8 different clerk sales support Maximum 6 floating vender sales operation Rechargeable battery





OIML (E



CT100 SERIES






Product line up



Network system

TCP/IP communication protocol

- IEEE802.11b/g specification wireless network
- Wireless Security : WEP 64/128, WPA, WPA2
- One to one, multi to multi & wired/wireless network

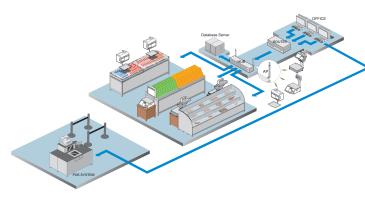

User-friendly PC software

User-Friendly Scale management software. PLU programming, store data, sales report, receipt editor and much more.



PLU Editor

Enables easy PLU control. Allows PLU's management by excel.

Ticket Editor

Easy downloading of ticket formats.

Sales report

Various reports available

FEATURES

Wide and legible Display

CT100 Series uses wide and high legible display.

Innovative colors, traditional shape and performance are the characteristecs of LCD display with LED backlight







Tilting user display

Extremely Portable

Do sale wherever you want! Easily move location with the compact design, Rechageable battery





Key-pad



-Max 8 EA (Direct 4 ea / Indirect 4 ea)


r -30 Function Keys
- Easily operate with various function keys

-30 PLU Keys

-1,000 Indirect PLUs

Floating Clerk

Floating vender function and PLU function Floating clerk function is possible with RS485 for up to 6 scale



Powerful sales report

Period report



Category report



Receipt Printing

High-definition& High speed thermal printer is built in for receipt printing. It can easily and quickly replacement of new paper roll







Various Interface

It supports various interface, such as RS-232C 2EA, Cash drower, USB, RS-485, LAN option(USB Host, Zigbee, WLAN)



